

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

LINDÉN, Stefan
Bergenstråhle & Lindvall AB
Box 17704
S-118 93 Stockholm
SUÈDE

Date of mailing (day/month/year) 05 décembre 2001 (05.12.01)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference SEL/UM 44020	
International application No. PCT/SE00/01877	International filing date (day/month/year) 27 septembre 2000 (27.09.00)

1. The following indications appeared on record concerning:

☒ the applicant ☐ the inventor ☐ the agent ☐ the common representative

Name and Address CISCO PHOTONICS SWEDEN AB Västberga Allé 9 S-126 30 Hågersten Sweden	State of Nationality SE	State of Residence SE
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person ☒ the name ☐ the address ☐ the nationality ☐ the residence

Name and Address CISCO SYSTEMS (SWEDEN) AB Västberga Allé 9 S-126 30 Hågersten Sweden	State of Nationality SE	State of Residence SE
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

3. Further observations, if necessary:

4. A copy of this notification has been sent to:

<input checked="" type="checkbox"/> the receiving Office	<input type="checkbox"/> the designated Offices concerned
<input type="checkbox"/> the International Searching Authority	<input checked="" type="checkbox"/> the elected Offices concerned
<input checked="" type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer François BAECHLER Telephone No.: (41-22) 338.83.38
---	---

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner
 US Department of Commerce
 United States Patent and Trademark
 Office, PCT
 2011 South Clark Place Room
 CP2/5C24
 Arlington, VA 22202
 ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 14 June 2001 (14.06.01)	
International application No. PCT/SE00/01877	Applicant's or agent's file reference SEL/UM 44020
International filing date (day/month/year) 27 September 2000 (27.09.00)	Priority date (day/month/year) 27 September 1999 (27.09.99)
Applicant EGNELL, Lars et al	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

18 April 2001 (18.04.01)

☐ in a notice effecting later election filed with the International Bureau on:

2. The election
- ☒
- was

☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer Nestor Santesso Telephone No.: (41-22) 338.83.38
--	--

INTERNATIONAL COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference SEL/UM 44020	FOR FURTHER ACTION		See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)
International application No. PCT/SE00/01877	International filing date (<i>day/month/year</i>) 27.09.2000	Priority date (<i>day/month/year</i>) 27.09.1999	
International Patent Classification (IPC) or national classification and IPC H04J 14/02			
Applicant Cisco Systems (Sweden) AB et al			

1.	This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2.	This REPORT consists of a total of <u> 5 </u> sheets, including this cover sheet. <input type="checkbox"/> This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT). These annexes consist of a total of <u> </u> sheets.
3.	This report contains indications relating to the following items: I <input checked="" type="checkbox"/> Basis of the report II <input type="checkbox"/> Priority III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability IV <input type="checkbox"/> Lack of unity of invention V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability, citations and explanations supporting such statement VI <input type="checkbox"/> Certain documents cited VII <input checked="" type="checkbox"/> Certain defects in the international application VIII <input type="checkbox"/> Certain observations on the international application

Date of submission of the demand 18.04.2001	Date of completion of this report 19.12.2001
Name and mailing address of the IPEA/SE Patent- och registreringsverket Box 5055 S-102 42 STOCKHOLM Facsimile No. 08-667 72 88	Authorized officer Peder Gjervaldsaeter /OGU Telephone No. 08-782 25 00

I Basis of the report**1. With regard to the elements of the international application:***

- ☒ the international application as originally filed
- ☐ the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the claims:
pages _____, as originally filed
pages _____, as amended (together with any statement) under article 19
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the drawings:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____
- ☐ the sequence listing part of the description:
pages _____, as originally filed
pages _____, filed with the demand
pages _____, filed with the letter of _____

2. With regard to the language, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language _____ which is:

- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).

3. With regard to any nucleotide and/or amino acid sequence disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. ☐ The amendments have resulted in the cancellation of:

- ☐ the description, pages _____
- ☐ the claims, Nos. _____
- ☐ the drawings, sheet/fig _____

5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2 (c)).**

* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

** Any replacement sheet containing such amendments must be referred to under item I and annexed to this report.

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE00/01877

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Claims	<u>1-8</u>	YES
	Claims	<u> </u>	NO
Inventive step (IS)	Claims	<u>2-7</u>	YES
	Claims	<u>1.8</u>	NO
Industrial applicability (IA)	Claims	<u>1-8</u>	YES
	Claims	<u> </u>	NO

2. Citations and explanations (Rule 70.7)

The most relevant prior art documents cited in the International Search Report are:

D1: Wen De Zhong, "New Bi-Directional WDM Ring Networks with Dual Hub Nodes", Global Telecommunications Conference 1997, GLOBECOM '97, IEEE Vol. 1, 3-8 Nov. 1997, pages 556-560.

D2: Ho et al., "Eight-channel bidirectional WDM add/drop multiplexer", Electronics Letters, Vol. 34, No. 10, 14 May 1998, pages 947-948.

D3: US 5754545

D1 discloses an add/drop multiplexer structure comprising two arrayed-waveguide grating multiplexers (AWGM). Each AWGM adds/drops a number of channels to/from connections to a bi-directional WDM ring network, respectively (refer especially to page 557, left column, last paragraph and Figure 3). The AWGMs have the same principal construction.

The invention according to present claims 1 and 8 differs from the technique of D1 in that there are two add/drop modules for each wavelength channel. Nevertheless, it is considered obvious to a person skilled in the art to look at the two AWGMs in D1 as a unit comprising two add/drop modules for each channel and thereby easily change the node configuration and the AWGMs, and thus arrive at the present invention. Since no unexpected technical effect has been achieved the invention according to claims 1 and 8 is obvious to a person skilled in the art.

Consequently, the invention according to the broad claims 1 and 8 is not considered to involve an inventive step.

.../...

Supplemental Box

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: Box V.

It is also considered obvious to a person skilled in the art to arrive at present invention by combining information disclosed by D2 and D3. D2 discloses a WADM comprising two add/drop modules for each wavelength channel in a bidirectional WDM add/drop multiplexer. D3 discloses an add/drop multiplexer comprising add/drop pairs which adds and drops channels in the same direction.

What is claimed in claims 2-7 is not described in any of the documents in the international search report and is therefore considered to involve an inventive step.

The invention as claimed in claims 1-8 is novel and comprises industrial applicability

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No.

PCT/SE00/01877

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:

The expression "one add/drop module comprises two add/drop modules" of claim 8 (page 8 line 14) should probably read "one add/drop node comprises two add/drop modules".

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 April 2001 (05.04.2001)

PCT

(10) International Publication Number
WO 01/24432 A1

(51) International Patent Classification⁷: **H04J 14/02**

(21) International Application Number: **PCT/SE00/01877**

(22) International Filing Date:
27 September 2000 (27.09.2000)

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
9903521-4 27 September 1999 (27.09.1999) **SE**

(71) Applicant (for all designated States except US): **CISCO PHOTONICS SWEDEN AB [SE/SE]; Västberga Allé 9, S-126 30 Hägersten (SE).**

(72) Inventors; and

(75) Inventors/Applicants (for US only): **EGNELL, Lars [SE/SE]; Klubbvägen 14, S-133 37 Saltsjöbaden (SE). BENGT, Johansson [SE/SE]; Naumansvägen 19, S-129 38 Hägersten (SE). LIDÉN, Fredrik [SE/SE]; Åldermannavägen 96, S-145 57 Norsborg (SE). LINDGREN,**

Fredrik [SE/SE]; Luthens Gränd 4B, S-118 66 Stockholm (SE). BONNEDAL, Dag [SE/SE]; Savolaksvägen 20, S-122 37 Enskede (SE). HULTÉN, Ola [SE/SE]; Tunnbrödsvägen 59, S-168 64 Bromma (SE).

(74) Agents: **LINDÉN, Stefan et al.; Bergenstråhle & Lindvall AB, Box 17704, S-118 93 Stockholm (SE).**

(81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**


(84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).**

Published:

— With international search report.

[Continued on next page]

(54) Title: **CONNECTION OF AN ADD/DROP NODE**

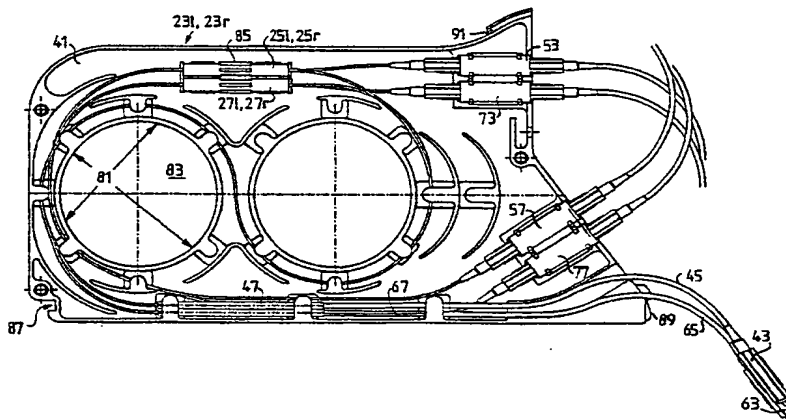

(57) Abstract: An add/drop-node of an optical WDM-network which has two fiber paths for light of a plurality of channels propagating in opposite directions comprises two add/drop modules (23l, 23r) for each of the channels. All the modules are identically constructed. Each module comprises an add device (25l, 25r) for adding light to one of the paths and a drop device (27l, 27r) for deflecting a portion of light from a second one of the paths. A module comprises a house (41) enclosing the add device and the drop device. A first fixed connector (53, 73) is attached to the house for connection in the first path and to an optical fiber (45, 65) which extends freely from the house and has a first free connector (43, 63) at its free end to be attached to the fixed connector of a neighbouring add/drop module for continuing the first path through the considered add/drop module to the neighbouring module. In the same way a second fixed connector is attached to the house for connection in the second path and to a second optical fiber which extends freely from the house and has a second free connector at its free end to be attached to the fixed second connector of a neighbouring add/drop module for continuing the second path through the considered add/drop module to the neighbouring module.



— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONNECTION OF AN ADD/DROP NODE

TECHNICAL FIELD

The present invention relates to an add/drop node of an optical WDM-network, in particular to the connection of an add/drop node to two paths of the network carrying
5 light in opposite directions, and to a network including such an add/drop node.

BACKGROUND

Optical networks using WDM (Wavelength Division Multiplexing) are now proposed to be built more and more. In such networks a plurality of add/drop nodes are connected and simple devices should be provided for connecting the nodes to the
10 network. For example, when an existing node is expanded to be capable of receiving and transmitting in another wavelength band the manual work required therefor should be minimized. An optical network having add/drop nodes is for example disclosed in U.S. patent 5,754,545.

SUMMARY OF THE INVENTION

15 It is an object of the invention to provide an add/drop node for an optical WDM-network having a simple way of connecting the node to circulating fiber paths of the network.

It is another object of the invention to provide an optical WDM-network having an add/drop node built to allow a simple way of connecting the node to parallel fiber paths
20 of the network.

Thus generally, an add/drop node is intended to be connected in an optical WDM-network. The network has two parallel fiber paths allowing light of a plurality of wavelength channels to propagate in opposite directions. The add/drop node comprises two add/drop modules for each of the channels. All the modules are identically
25 constructed and most of their connections are very similar to each other allowing a simple mounting and connection of the components of the node and also a simple rearrangement for changing wavelength channels and for adding/deleting wavelength channels used in the network. Each module comprises an add device for adding light to a first one of the paths and a drop device for deflecting a portion of light from a second one of the paths.
30 The add device and the drop device of a module are enclosed by comprises a house, the houses of the modules being placed in a single row, at the sides of each other and for instance mounted in a rack. A first fixed connector is attached to the house of a module for connection in the first path and to a an optical fiber which extends freely from the house and has a first free connector at its free end to be attached to the fixed connector
35 of a neighbouring add/drop module for continuing the first path through the considered add/drop module to the neighbouring module. In the same way a second fixed connector is attached to the house for connection in the second path and to a second optical fiber which extends freely from the house and has a second free connector at its free end to be attached to the fixed second connector of a neighbouring add/drop module for continuing

the second path through the considered add/drop module to the neighbouring module.

More particularly, in the add/drop node two add/drop modules are provided for each of the channels of light propagating in the network. Each add/drop module has an add device or light combiner for adding light to one of the two optical fiber paths and it has also a drop device for deflecting a portion of light from the other optical fiber path. Furthermore, all the add/drop modules have the same construction. The add/drop modules can then be arranged in two sets, so that the add/drop modules of a first set have their add devices connected in one fiber path and their drop devices connected in the other fiber path. Also, the add/drop modules of the second set then have their add devices connected in the other fiber path and their drop devices connected in said one fiber path.

In at least each of the two sets the add/drop modules are placed at the sides of each other and then inner modules and two end modules are obtained in each set. For two adjacent or neighbouring add/drop modules of a set an output of the add device in a first one of the two adjacent add/drop modules can be connected to an input of the add device in a second one of the two adjacent add/drop modules. In the same way, for two adjacent add/drop modules an output of the drop device in a first one of the two adjacent add/drop modules can be connected to an input of the drop device in a second one of the two adjacent add/drop modules. For one of the end add/drop modules comprised in a first set its drop device can have an output connected to an input of the add device of one of the two end add/drop modules in the other, second set. Similarly, for said one end add/drop module of the second set its drop device can have an output connected to an input of the add device of said one end add/drop module in the first set.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described by way of a non-limiting embodiment with reference to the accompanying drawings, in which

- Fig. 1 is a block diagram of an optical network having a ring architecture and a hub node and four client nodes,
- Fig. 2 is a schematic picture of the connection lines of an add/drop module used in the nodes of the network,
- Fig. 3 is a view from the side of the inside of a house of an add/drop module,
- Fig. 4 is a front view of a plurality of add/drop modules mounted in a rack,
- Fig. 5 is a block diagram schematically showing the connections of add/drop modules of the nodes,
- Fig. 6 is a block diagram showing in a somewhat more realistic way the connections of add/drop modules of the nodes, and
- Fig. 7 is a perspective view showing the inside of a house of an add/drop module.

DETAILED DESCRIPTION

In Fig. 1 a block diagram of an optical fiber WDM-network having a ring configuration is shown. Thus two optical fiber paths 1e, 1w pass in a basically uninterrupted way

all around the network, one fiber path 1e carrying light propagating in the east direction and the other fiber path 1w carrying light propagating in the west direction.

The network includes a hub node 2 and in the embodiment shown four client nodes 3, called Client 1, 2, 3 and 4, the nodes being connected to the two basic fiber paths 1e, 1w for adding and dropping light from the fibers. A client node n receives and transmits information in a narrow wavelength band, also called channel, around a single wavelength λ_n , $n = 1, 2, \dots$. The hub node 2 can receive and transmit information in all channels, i.e. on all wavelengths λ_n , $n = 1, 2, \dots$. For each client node 3, the hub node 2 is connected to an electrical client portion 5. Such an electrical client portion 5 comprises an electrooptic converter or optical transmitter 7 converting electrical signals to optical signals and an optoelectric converter or optical receiver 9 for receiving optical signals converting the received signals to electrical signals. The electrical client portion 5 is through optical fibers connected to an optical client portion 11 in the hub node 2. The optical client portion 11 has optical connectors for receiving the optical fibers extending from the respective electrical client portion.

The optical client portion 11 comprises an optical receiver-transmitter combination 13, 15 for transmission, the receiver 13 of the combination receiving the light signal from the transmitter 7 of the electrical client portion 5 providing its output signal to the transmitter 15 of the pair, which provides a well-defined light signal in the narrow wavelength band used for the respective client. The optical transmitter 15 is coupled to an optical connector for providing its output signal on an optical fiber to add/drop modules as will be described hereinafter.

The optical client portion 11 also comprises an optical receiver-transmitter combination for receiving, the combination comprising two optical receivers 17e, 17w connected to receive light from the add/drop modules through optical fibers and optical connectors, one receiver 17e being used for receiving light propagating in the network, in the appropriate fiber, in an east direction and another receiver 17w being used for receiving light propagating in the west direction in the ring network. The outputs of the two optical receivers 17e, 17w are connected to inputs of a combining element or optical multiplexer 19 which combines the received signals to provide them to a transmitter 21, the output terminal of which is through the respective connector and a fiber length connected to the receiver 9 in the electrical client portion 5.

Furthermore, the hub node 2 includes a plurality of add/drop modules 23l, 23r, one pair of such add/drop modules being provided for each client node 3 in the network. In such a pair one module 23l is adapted to transmit in a left direction from the hub node and to receive from the same left direction. The other module 23r of a pair is adapted to transmit in and to receive from the right direction from the hub node. Each add/drop module is connected in the two ring-shaped fiber paths 1e, 1w of the network. A left add/drop module 23l comprises one add device 25l connected in the fiber ring path 1w and

one drop device 27l connected in the other fiber ring path 1e. The add device 25l is through fiber pieces, a 50/50 splitting coupler 29 (only one is shown in the drawing) and the respective connector connected to the transmitter 15 in the optical client portion 11 for the appropriate client node. The drop device 27l is through a fiber and the respective
5 connector connected to the receiver 17e in the optical client portion 11 for the same client node.

In the same way, the right add/drop module 23r in the pair comprises one add device 25r connected in the fiber ring path 1e and one drop device 27r connected in the other fiber ring path 1w. The add device 25r is through fiber pieces, the respective
10 splitting coupler 29 and the respective connector connected to the transmitter 15 in the optical client portion 11 for the client node. The drop device 27r is through a fiber and the respective connector connected to the receiver 17w in the optical client portion 11 for the client node.

The add devices 25l, 25r contain some coupling or combining element and if
15 required a notch filter blocking light of the wavelength band or channel for which the add/drop module is designed. The optional filter will then stop only light of said wavelength band propagating in the respective fiber ring path 1w, 1e before light of the same wavelength band is added in the combining element. The drop devices 27l, 27r contain in the same way some splitting and filtering element for tapping off only light of
20 the wavelength band or channel for which the add/drop module is designed.

It appears that all add/drop nodes 23l, 23r have the same basic design and functions and can thus all be given the same physical shape as will be discussed hereinafter.

The two fiber ring paths 1e, 1w are connected to the hub node 2 on a left side of the hub node and on a right side of the node. At each such side a monitor module 31l,
25 31r can be arranged which is thus connected in the two ring paths. A monitor module 31l, 31r comprises an add coupler 33l, 33r for adding e.g. some control signal and a tap 35l, 35r for tapping off some small portion of the incoming light power, e.g. 1%.

The schematic diagram of Fig. 2 illustrates the functions of an add/drop module 23l, 23r. The module comprises a house indicated at 41. Light from one 1e of two ring
30 paths of the network enters the module at a connector 43 attached to a fiber piece 45 extending loosely outside the house 41. The fiber piece 45 has a thick protective sleeve and is inside the house at 47 welded to an end of an optical fiber 49 having a standard thin protective sleeve. The optical fiber piece 49 is at its opposite end connected to one of the two inputs of the add device 25l, 25r. The output of the add device is connected to a
35 fiber piece 51, which in turn is connected to a connector 53 attached to the house 41. The connector 53 should be connected in the same ring path 1e as the input connector 43. The other input of the add device is through a fiber piece 55 connected a connector 57 attached to the house 41. The connector 43 thus receives light from the ring path 1e to make it continue to the fiber 45, through the weld 47, the fiber piece 49, the add device

25l, 25r, the fiber piece 51 to the connector 53. The output connector 53 lets the light continue along the ring path 1e. Light from an optical client portion 11 enters the module at the connector 57, continues through the fiber 55 to the add device 25l, 25r, in which the light is added to that propagating along the ring path 1e.

5 Furthermore, in the module 23l, 23r there is a set of connected fiber pieces, which is parallel to that described and is connected in the other ring path 1w of the network but in which instead of the add device 25r, 25l the drop device 27l, 27r is connected. Thus a connector 63 is to be connected to the other ring path and is attached to an end of a well protected fiber piece 65 extending partly outside the house 41, the other end being
10 connected through a weld 67 to a standard fiber piece 69. This fiber piece is in turn connected to one of the two outputs of the drop device 27l, 27r. The input of the drop device is connected to fiber piece 71 which receives light from a connector 73 attached to the house 41. The connector 73 should be connected in the respective ring path 1w. The other output of the drop device 27l, 27r is connected to an end of a fiber piece 75 which
15 has its other end connected to a connector 77 attached to the house 41. This connector is through a fiber attached to a respective receiver 17w (17e) in the optical client portion 11. Light from the ring path 1w enters the module at the connector 73, continues through the fiber 71, the drop device 27l, 27r, the fiber 69, the weld 67, the thick fiber 65 to the loose connector 63, which in turn is connected in the respective ring path 1w of the
20 network. Some light of a specific wavelength band is tapped off in the drop device 27l, 27r and continues through the fiber 75 to the connector 77 and therefrom to the respective optical client portion 11.

The physical layout of the interior of an add/drop module house 41 is shown in Fig. 3. The module house 41 comprises a substantially flat portion from which various walls
25 stand out. The walls all have the same height and connect to a basically flat lid, not shown, which is mounted over the house 41. The walls form two circular winding cores 81 having a sufficiently large diameter, e.g. about 50 mm, allowing that fibers can be wound around them and not being subjected to too small bending radii (too large curvatures). The two winding cores 81 are placed at some distance of each other allowing
30 that fibers can pass therebetween. By arranging two such cores the fiber pieces used can be allowed to have some extra length allowing them to be comfortably handled and to again be spliced to the devices in the case of fiber breaks or bad splices and also, the direction of the fiber pieces at the places where they are connected to the devices can be selected to be the proper one not using too small bends, by placing the fibers for instance
35 in a configuration similar to the figure eight around the two cores 81. Inside the walls forming the winding cores through-holes 83 may be arranged for an easy handling of the module house. The add devices 25l, 25r and the drop devices 27l, 27r can be attached between outstanding walls 85 at the top of the house.

At the lower edge of the house 41 devices are provided for attaching the house to a

rack, the attaching devices comprising a notch 87 at the rear side and a snap device 89 at the front side. A channel 91 is formed at the front top side of the house 41 to allow fibers connecting the module to the associated optical client portion to be held therein.

Fig. 4 is a front view of the add/drop modules 23l, 23r and the monitor modules 31l, 31r mounted in a rack, the loosely extending fiber pieces 45, 65 not being visible in this figure. By comparing Fig. 4 to Fig. 1 it is seen that the connection of all left add/drop modules 23l is as indicated in Fig. 3, the extending fiber pieces 45 being inserted in the mating connectors 53, 73 in the adjacent module at the left side of the respective module. This connection is illustrated in the schematic view of Fig. 6, see also Fig. 5. Thus, in Fig. 5 the same basic connection as in Fig. 1 is illustrated, where, in the right modules 23r the add devices and the drop devices have changed places with each other. Then a cross coupling must be made between the group of left modules 23l and the group of right modules 23r and between the right group and the right monitor module 31r as compared to the straight schematic connection of modules shown in Fig. 1. The same connection of the modules is illustrated in Fig. 6 in which the connections between the add/drop modules using loosely extending fiber pieces is shown. From this figure it appears clearly that all add/drop modules 23l, 23r can have an identical construction, only the tapping-off devices and filters being special to the channel for which the respective module is designed. The cross coupling is made in the middle of the assembly of add/drop modules, between the left and right modules. Such a cross connection can be made by connecting the loose fiber pieces 101 having optical connectors at each end in a cross configuration or a particular cross connecting module can be used. Such a module has the same exterior design as the other modules but has inside just the optical fibers connected cross-wise. In Fig. 4 a multitude of add/drop modules 23l, 23r are illustrated. However, only a portion of the add/drop modules may be active ones, constructed as described above. At the side of the active modules dummy modules are inserted having the same exterior layout but without the connectors and the loosely extending fibers. The dummy modules are used for just filling up the space between the active modules and the monitor modules.

The two monitor modules 31l, 31r both have the same exterior connectors and interior devices as each other but have not the same interior connection lines. The necessary connections appear clearly from Fig. 1.

The client nodes 3 in the network have the same basic design as the hub node 2 but are designed to receive and transmit in only one wavelength band. The same kind of add/drop modules as described above can for example be used.

In other network ring architectures the client nodes can receive and transmit in more than one wavelength band. Then the client nodes can have the same structure as the hub node 2.

CLAIMS

1. An add/drop node to be connected in an optical WDM-network, the network including two optical fiber paths for letting light of a plurality of channels propagate in opposite directions in the network, **characterized by** two add/drop modules for each of the channels, each add/drop module comprising an add device for adding light to a first one of the two optical fiber paths and a drop device for deflecting a portion of light from a second one of the two optical fiber paths different from the first one and all add/drop modules having the same construction.

2. An add/drop node according to claim 1, **characterized in** that the add/drop modules are arranged in two sets, the add/drop modules of a first one of the two sets having their add devices connected in the first one of the two optical fiber paths and their drop devices connected in the second one of the two optical fiber paths and the add/drop modules of a second one of the two sets different from the first one having their add devices connected in the second one of the two optical fiber paths and their drop devices connected in the first one of the two optical fiber paths.

3. An add/drop node according to claim 2, **characterized in** that in each of the two sets the add/drop modules are placed at the sides of each other, and that for two adjacent add/drop modules an output of the add device in a first one of the two adjacent add/drop modules is connected to an input of the add device in a second one of the two adjacent add/drop modules.

4. An add/drop node according to claim 2, **characterized in** that in each of the two sets the add/drop modules are placed at the sides of each other, and that for two adjacent add/drop modules an output of the drop device in a first one of the two adjacent add/drop modules is connected to an input of the drop device in a second one of the two adjacent add/drop modules.


5. An add/drop node according to any of claims 2 - 4, **characterized in** that in each of the two sets the add/drop modules are placed at the sides of each other to form inner add/drop modules and two end add/drop modules in each set, the end add/drop modules having an add/drop module of the set on only one side, and that for one of the two end add/drop modules of a first one of the two sets its drop device has an output connected to an input of the add device of one of the two end add/drop modules in a second one of the two sets and that for said one of the two end add/drop modules of the second one of the two sets its drop device has an output connected to an input of the add device of said one of the two end add/drop modules in the first one of the two sets.

6. An add/drop node according to any of claims 1 - 5, **characterized in** that each add/drop module comprises a house enclosing the add device and the drop device of the add/drop module, a first fixed connector attached to the house for connection in the first one of the two optical fiber paths and a first optical fiber extending freely from the house and having a first free connector at its free end to be attached to the fixed connector of a



neighbouring add/drop module for continuing the first path through the considered add/drop module to the neighbouring module, and a second fixed connector attached to the house for connection in the second one of the two optical fiber paths and a second optical fiber extending freely from the house and having a second free connector at its free end to be attached to the fixed second connector of a neighbouring add/drop module for continuing the second path through the considered add/drop module to the neighbouring module.

7. An add/drop node according to claim 6, **characterized in that** the house includes two winding cores around which excessive fiber lengths connecting devices and connectors of the add/drop module can be wound.

8. An optical WDM-network including two optical fiber paths for letting light of a plurality of channels propagate in opposite directions in the network and at least one add/drop node connected to the two optical fiber paths, **characterized in that** the at least one add/drop module comprises two add/drop modules for each of the channels, each add/drop module comprising an add device for adding light to a first one of the two optical fiber paths and a drop device for deflecting a portion of light from a second one of the two optical fiber paths different from the first one and all add/drop modules having the same construction.

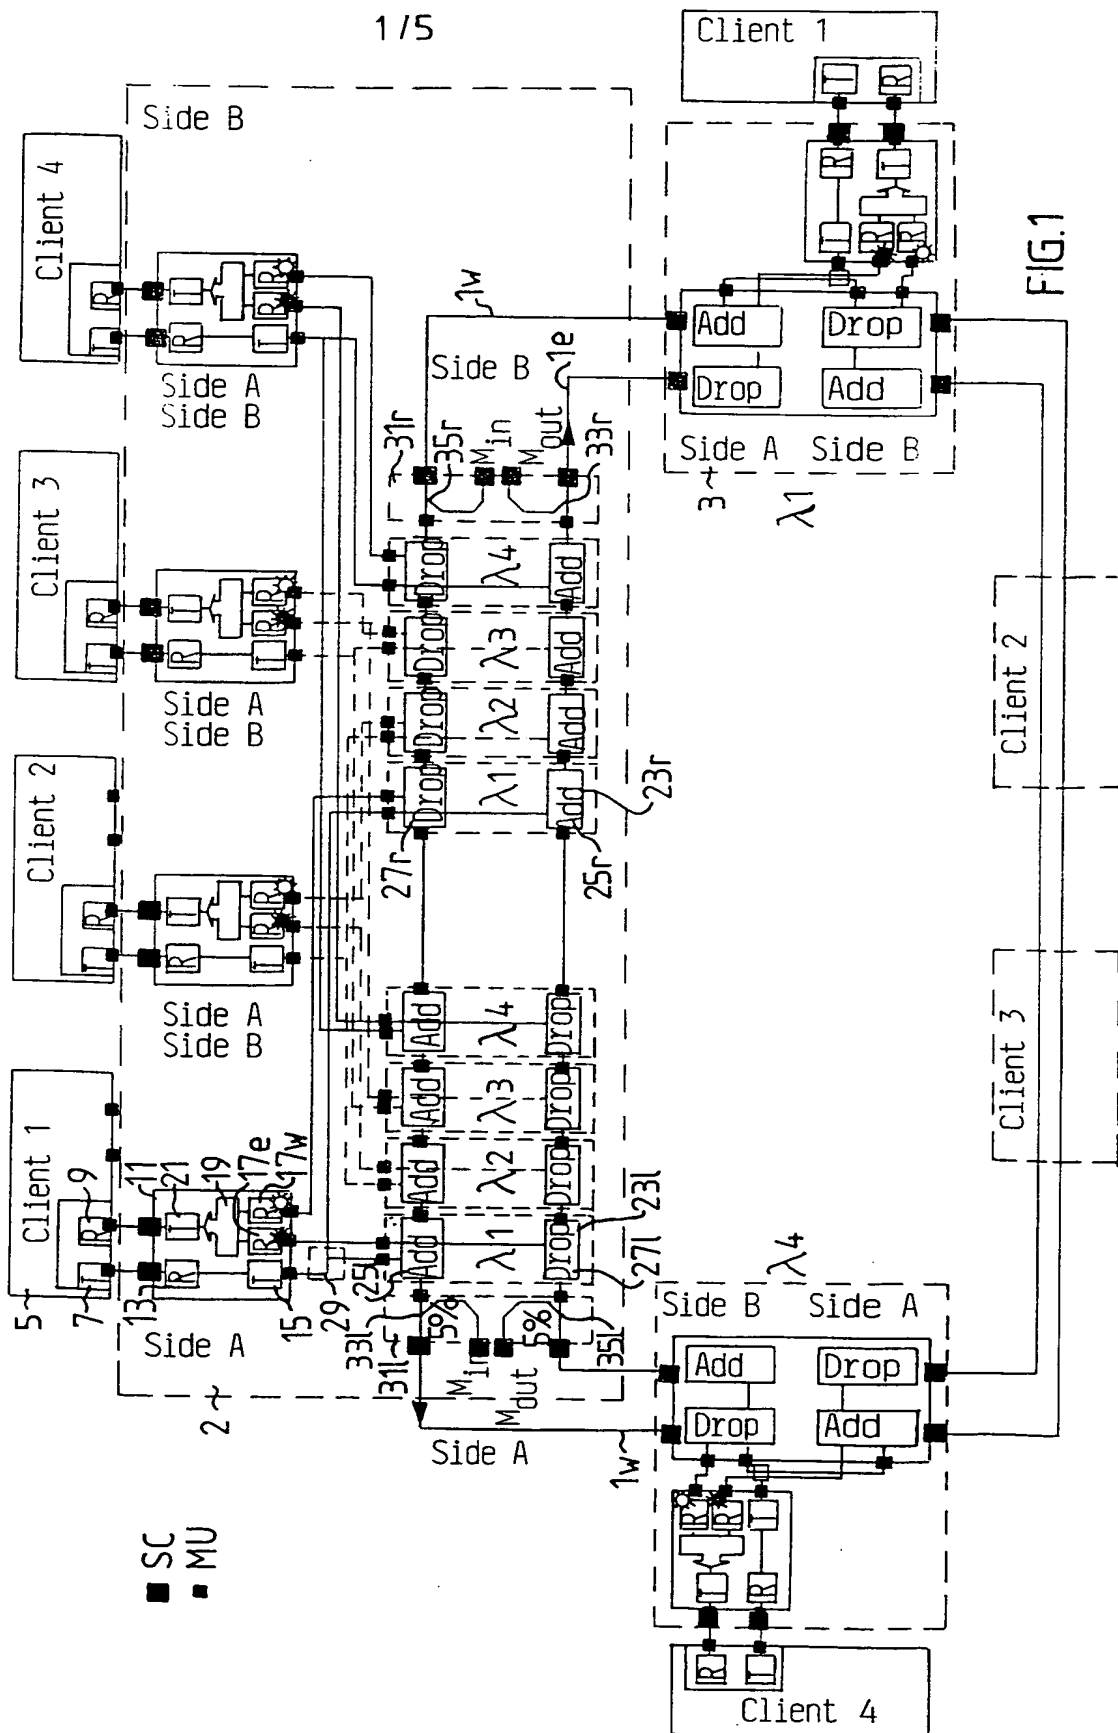

2 / 5

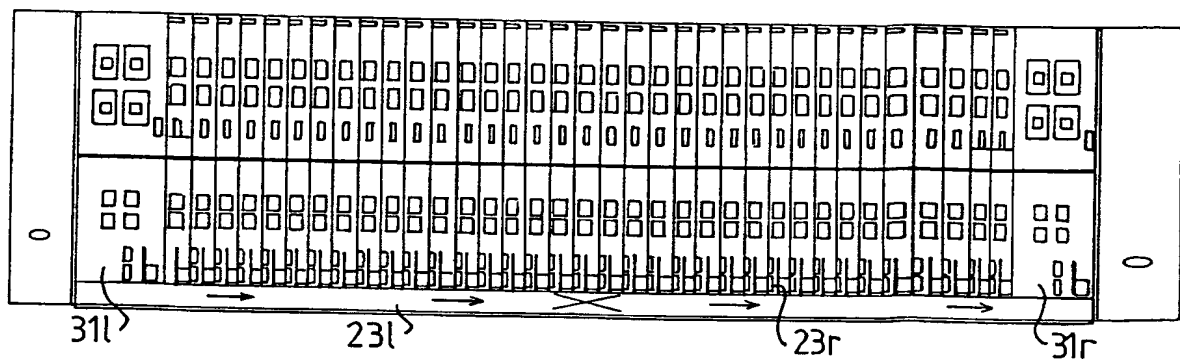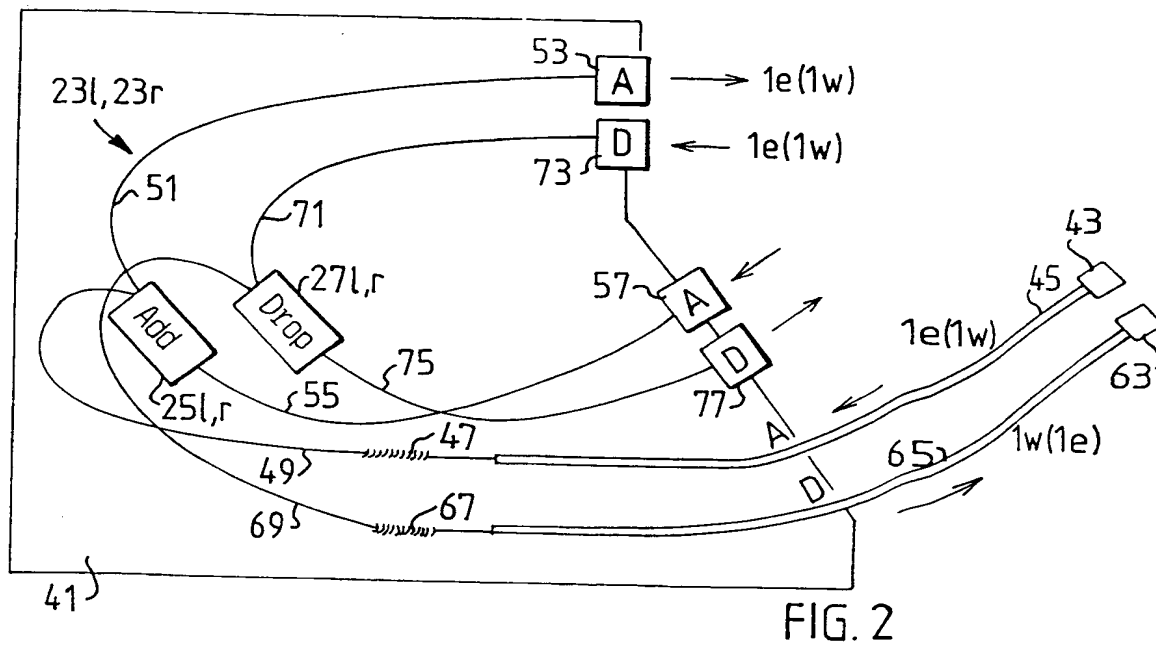

3 / 5

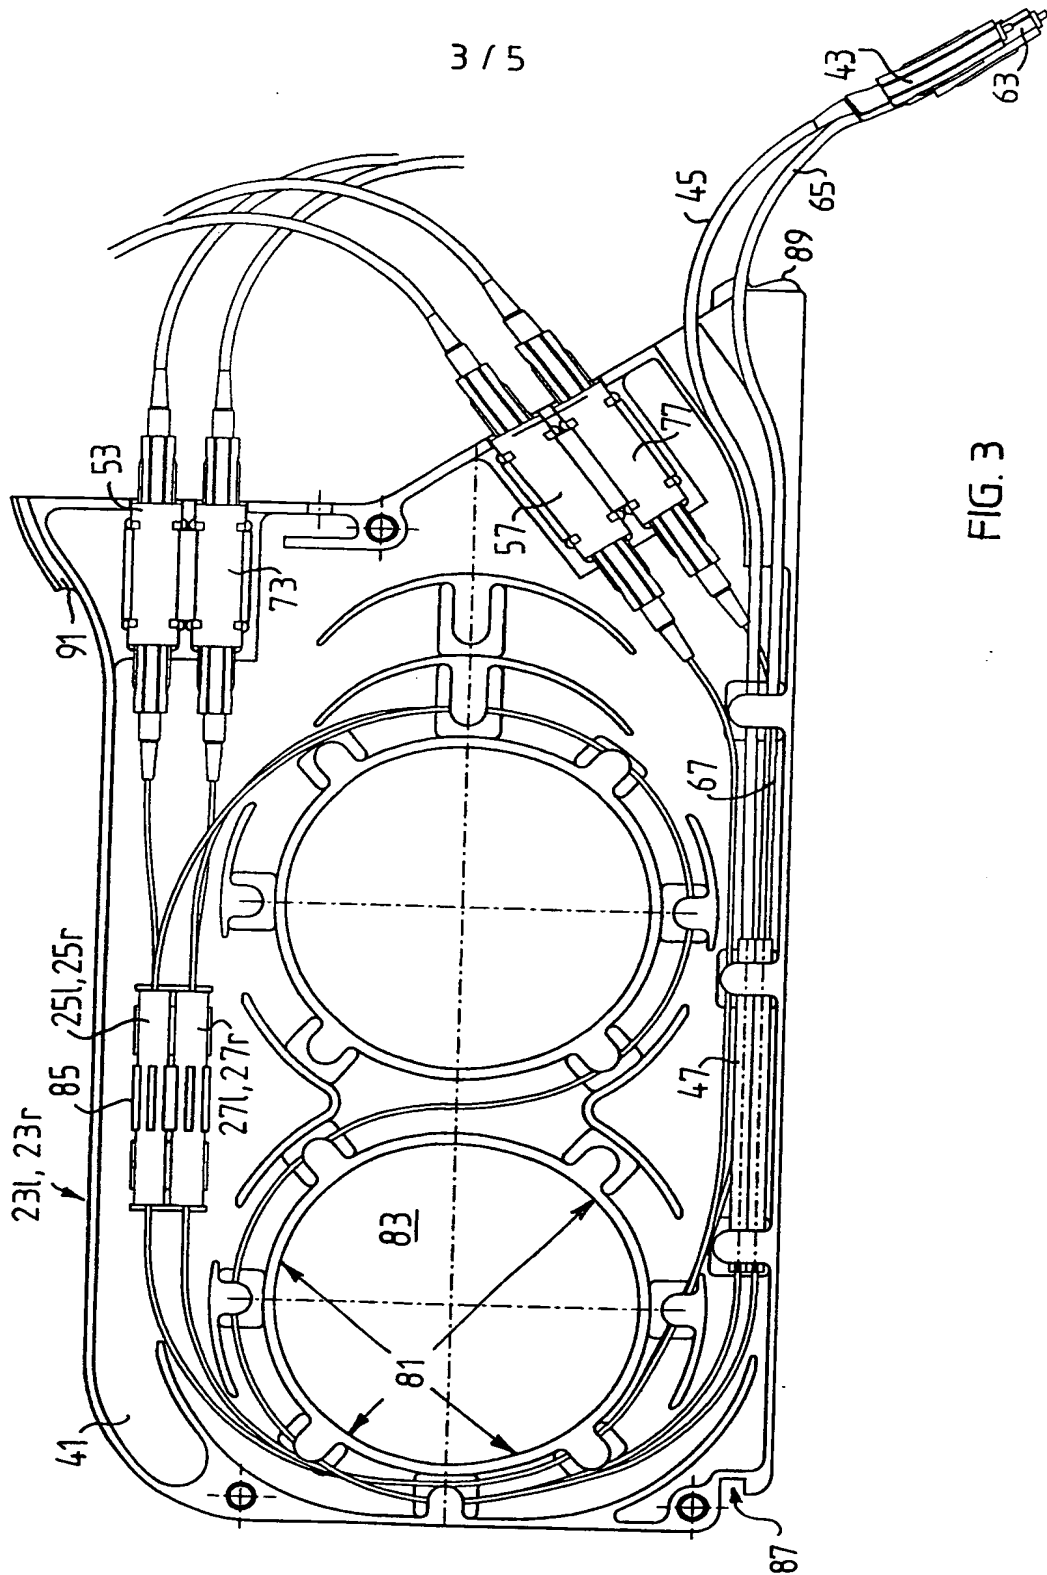


FIG. 3

4/5

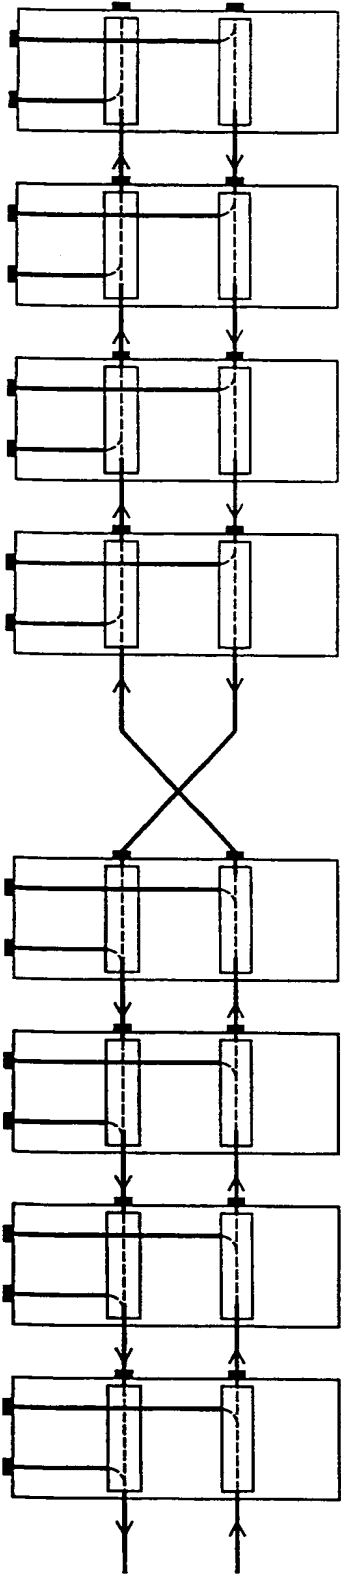


FIG. 5

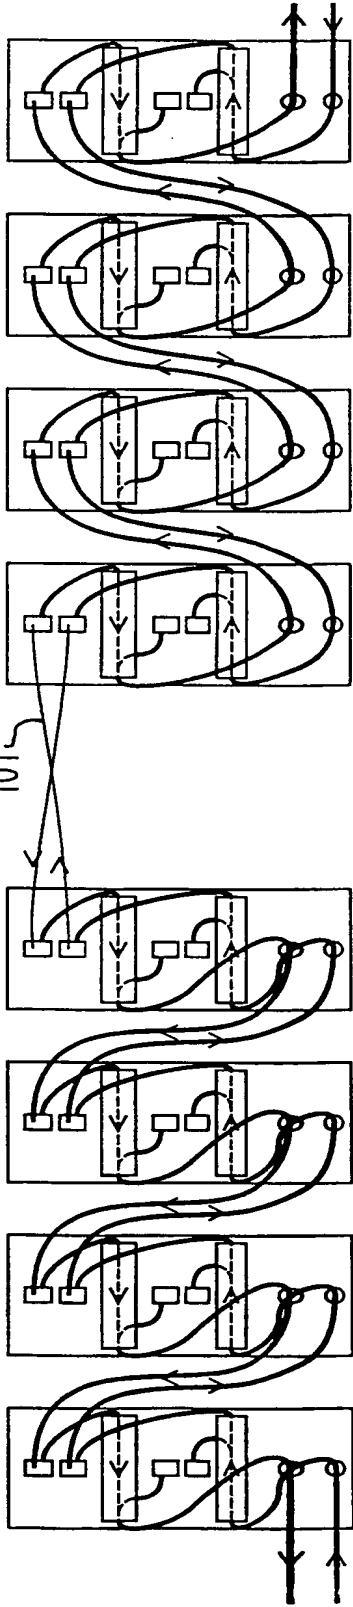


FIG. 6

5 / 5

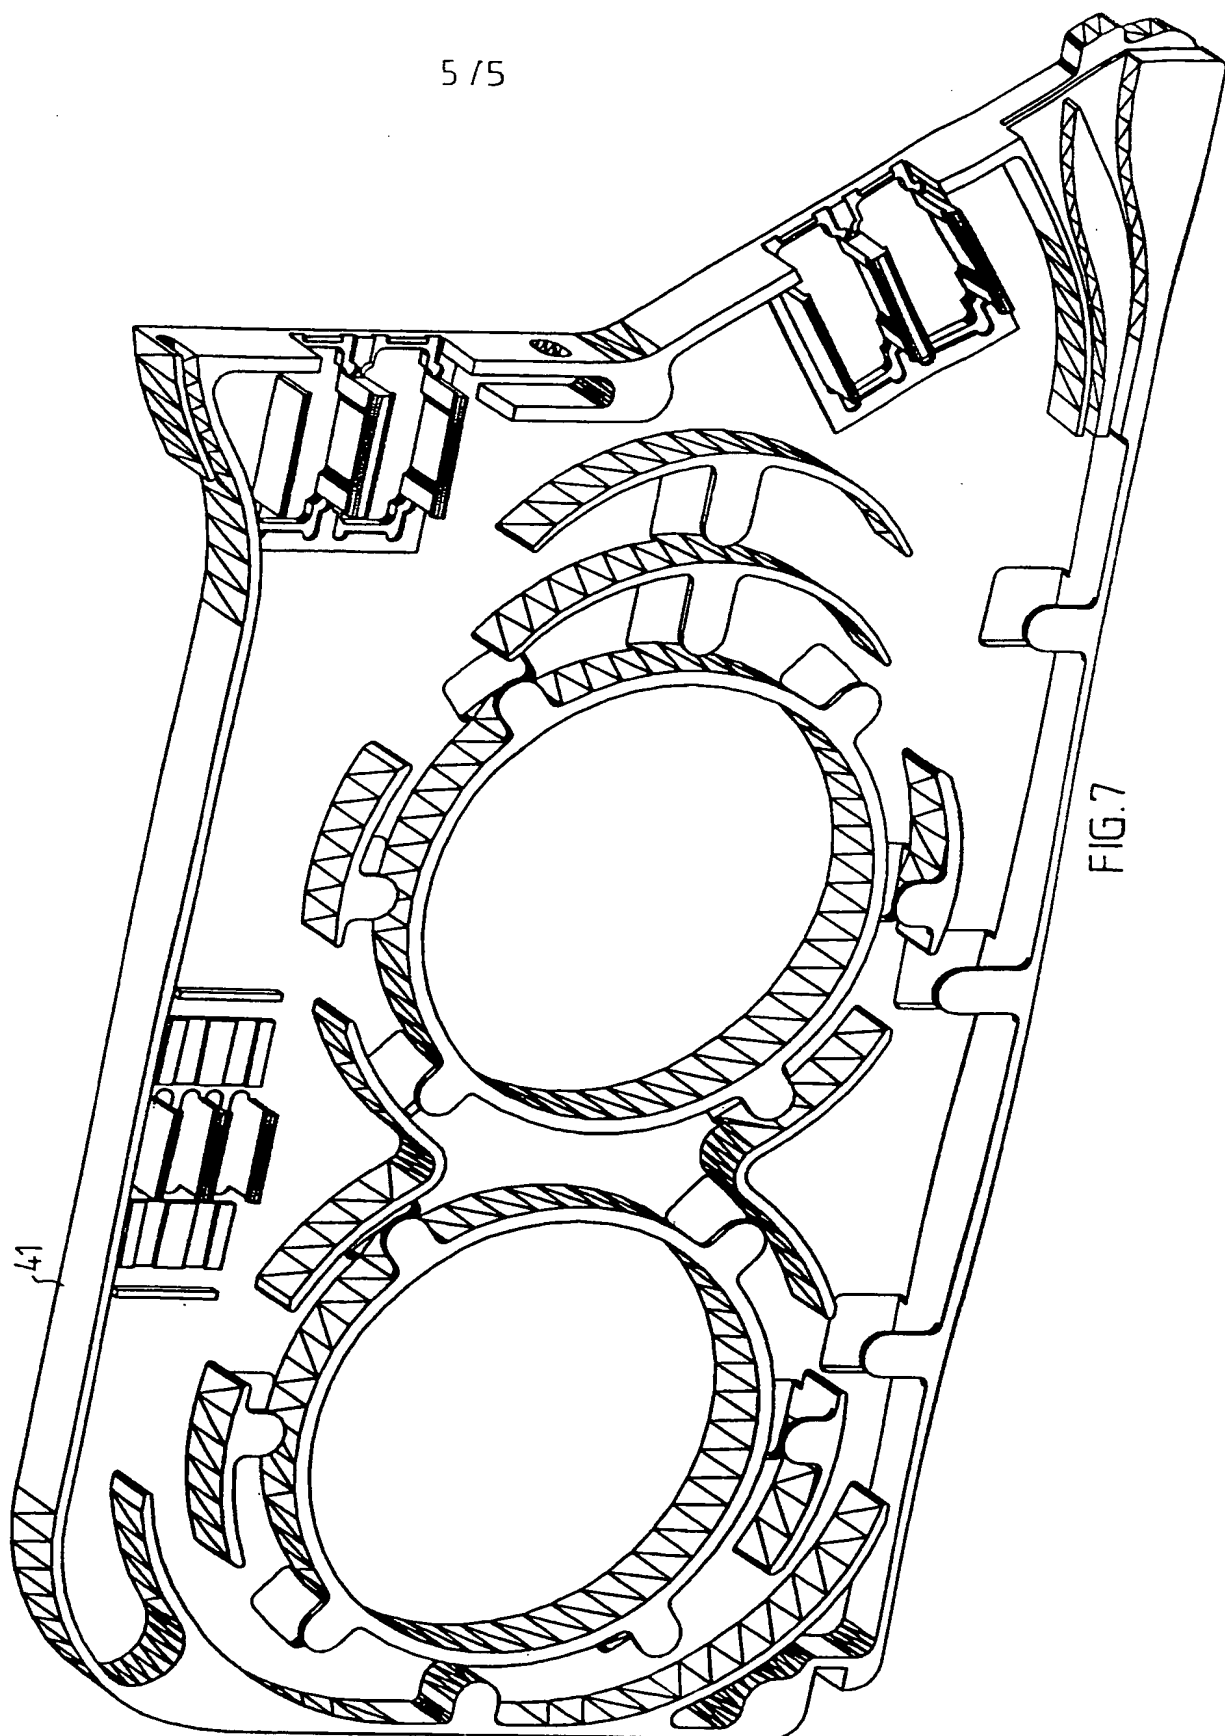


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01877

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04J 14/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04J, H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, EPODOC, IEL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ZHONG, Wen De. "New bi-directional WMD ring networks with dual hub nodes". In: Global Telecommunications Conference, 1997. GLOBECOM '97., IEEE. Vol. 1, 3-8 Nov. 1997, pages 556-560. section 2.1, fig 3	1,8
A	--	2-7
Y	HO, Keang-Po et al. "Eight-channel bidirectional WMD add/drop multiplexer". In: Electronics Letters. Vol. 34 Issue 10, 14 May 1998, pages 947-948. page 947, fig. 1	1,8
A	--	2-7

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 January 2001

Date of mailing of the international search report

23-01-2001

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Jonas Andersson /OGU

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 00/01877

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5754545 A (SHINIBASHI ET AL.), 19 May 1998 (19.05.98), column 39, line 51 - column 42, line 58, figures 20B, 21B, 22B, 33B	1,8
A	--	2-7
A	ZHAO, Y. et al. "A novel bi-directional add/drop module for single fiber bi-directional self-healing wavelength division multiplexed ring networks". In: Optical Fiber Communications Conference, 1999. Vol. 1, 21-26 Feb. 1999, pages 183-185.	1-8
A	--	
A	WO 9826531 A1 (INTERNATIONAL BUSINESS MACHINES CORPORATION), 18 June 1998 (18.06.98)	1-8
A	--	
A	EP 0920153 A2 (NEC CORPORATION), 2 June 1999 (02.06.99)	1-8
A	--	
A	US 5774606 A (DE BARROS ET AL.), 30 June 1998 (30.06.98), figures 4,6	1-8
A	--	
A	US 5953141 A (LIU ET AL.), 14 Sept 1999 (14.09.99)	1-8
	-- -----	

INTERNATIONAL SEARCH REPORT
Information on patent family members

27/12/00

International application No.

PCT/SE 00/01877

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
US	5754545	A	19/05/98	GB	2298767 A,B	11/09/96
				GB	2342014 A,B	29/03/00
				GB	2342257 A,B	05/04/00
				GB	9603922 D	00/00/00
				GB	9929817 D	00/00/00
				GB	9930548 D	00/00/00
				JP	8237215 A	13/09/96

WO	9826531	A1	18/06/98	EP	0886924 A	30/12/98
				JP	11504196 T	06/04/99

EP	0920153	A2	02/06/99	JP	2000078176 A	14/03/00
				JP	11163911 A	18/06/99

US	5774606	A	30/06/98	JP	10054922 A	24/02/98

US	5953141	A	14/09/99	NONE		



— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.